


The Ergomat Nitril is made of pure Nitril rubber and is designed to increase comfort while reducing tripping hazards, body aches, quality issues, and sick leaves. This is the ultimate mat for critical environments.

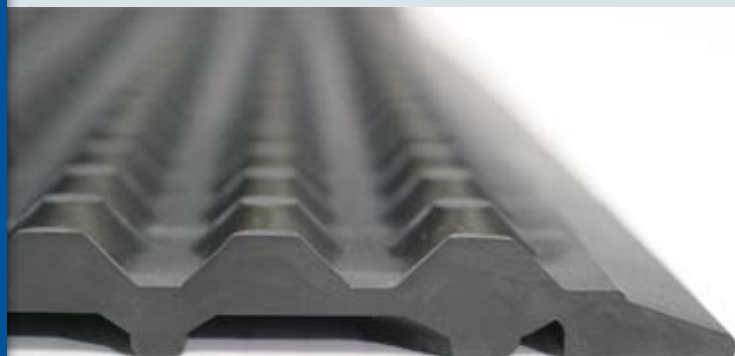

ERGOMAT® Nitril

Unmatched Safety Features

- Molded beveled edges
 - They will never curl up, eliminating tripping hazards
- Any size, any shape mat, always in one piece
 - No overlapping or worn out connecting mats, also eliminating tripping hazards.

Highest Quality

- Raw virgin material only
 - Unbeaten durability and ergonomic relief
- Silicone & latex-free
- Not only anti-fatigue, but also true ergonomic benefits
 - Unique ergonomic designs, eliminating and preventing common problems encountered in standing environments, by stimulation of blood circulation and increased alertness that will reduce sick leave, workers' compensation and quality issues.

The Nitril Advantage

- Chemical exposure will not affect the state of the mat; no curling up, swelling, or expanding.
 - No loss of the ergonomic properties and no tripping hazard
- Meets USDA / CFIA standards
- Offered in black and grey
- Cleanroom ISO Class 5 (100)

3-Year Warranty

All Ergomat product lines are conditionally warranted against normal usage* 24 hours a day, 7 days a week. The warranty does not cover damage caused by the mat being dragged or pulled from a heavy load or items being pushed or dragged across the product, such as skids or pallets. The warranty against chemicals, oils, liquids, or other matter differs with the type of mat. Please consult your dealer or an Ergomat Rep to select the correct mat for your environment. The warranty periods starts from the date of purchase. The warranty only covers the replacement of the product, no direct or indirect costs are covered.

* It is considered normal usage when a person stands or walks on the Ergomat with regular footwear.

info@ergomat.com

Tel. 877-374-6628

1.877.ERGOMAT.com

www.ergomat.com

Fax 800-357-2113

Properties	Norm	ERGOMAT Nitril
Material		Nitrile
Color		Black & Grey
Weight		3600 g +/- 50 g // 8 lbs +/- 1.75 oz
Length without beveled edges		91,4 cm +/- 1% // 36" +/- 1%
Width without beveled edges		60 cm +/- 1% // 23.6" +/- 1%
Thickness		11 mm // 0.43"
Density	ISO 2781	1370 kg/m ³
Hardness	ISO 868	50-60 Sh A
Friction	AVK Standard	45 N
Abrasion Load = 5 N	ISO 46 49 (5N)	92 mm ³ // 3.6 in ³
Elongation at break	ISO 37	790%
Tearing strength	ISO 34 Method C	28 N/mm
Electrical resistance Surface point to point % 50 RH	IEC-61340 4-1 / ESD STM7.1-2001	>1 x 10 ¹⁰ Ω
Insulation Resistance	EN 60 335-1994	12 kV
Flame Point	Table Value	400°C // 752°F
Thermal Conductance	Table Value	3,3 W/m/°C
Thermal properties		
Minimum use		-40°C // -40°F
Maximum use	The ergonomic properties remain	90°C // 194°F
Maximum short duration		600°C // 1112°F
UV-resistance		Inferior
Cleanroom application	EN ISO -14644-1	ISO Class 5 (100)
Warranty		3 years