



## ADAPTABLE & EFFICIENT

The Ciglio series is available in three popular lengths and with or without built-in occupancy detection. Daisy chain any of the six models with any of our five jumper cable options to create the perfect solution for virtually any design or power requirement. Daisy chained units can be controlled individually or in series for easy on/off and dimming of lights as needed.

Ciglio delivers more than 65 lumens per watt while consuming less power than traditional T12 florescent fixtures. To maximize energy savings by automatically turning off the light when the workspace is not in use, select one of our three models featuring our built in occupancy sensor.

Ciglio comes with a 5 year warranty and can be relied upon to provide years of dependable, efficient lighting.

**Workrite**  
ergonomics®




Available in Parent with or without occupancy sensors and Child units.



Optional integrated infrared occupancy sensor for energy savings.

# CIGLIO™ LED UNDER-CABINET LIGHT



- Series or individual daisy chain controls
- Expandable design: Link up to 80 inches of actual light fixture
- Adaptable: Five jumper cable length options: 3", 6", 12", 24" or 60"
- Energy saving occupancy sensor (on select models)
  - Turns light off after 15 minutes of inactivity and instantly back on when activity is detected
- Quick mount installation kit
- Bright white light output - 3500 K, 83 CRI
- Easy to operate touch sensitive switch
- Dimmable down to 15%
- ETL certified
- 90,000+ hour life LEDs (L70 rating)
- 5 year warranty
- Available in Sterling Silver
- 48 W Transformer included:
  - 24 V, 2 A, Class 2 transformer: two pronged on 3' cord connects to 4.625" x 2.5" x 1.5" transformer
  - 8' cord and barrel connector plug to fixture.
  - Transformer rated for input ranging from 100 VAC to 240 VAC.

Configuration	Occupancy Sensor	Fixture length	Model #
Daisy Chain Parent	Yes	20"	CIG-P-O-20-S
		27"	CIG-P-O-27-S
		35"	CIG-P-O-35-S
	No	20"	CIG-P-N-20-S
		27"	CIG-P-N-27-S
		35"	CIG-P-N-35-S


Configuration	Occupancy Sensor	Fixture length	Model # <sup>(1)</sup>
Daisy Chain Child/Jumper	Controlled by Parent	17"	CIG-J-17-03-S
			CIG-J-17-06-S
			CIG-J-17-12-S
			CIG-J-17-24-S
			CIG-J-17-60-S
		24"	CIG-J-24-03-S
			CIG-J-24-06-S
			CIG-J-24-12-S
			CIG-J-24-24-S
			CIG-J-24-60-S
32"	CIG-J-32-03-S		
	CIG-J-32-06-S		
	CIG-J-32-12-S		
	CIG-J-32-24-S		
	CIG-J-32-60-S		

(1) Includes Jumper Cord: 03 -3", 06 -6", 12 -12", 24 -24", 60 -60"


## Dimensions

### Lengths


Parent units (with and without Occupancy Sensor)

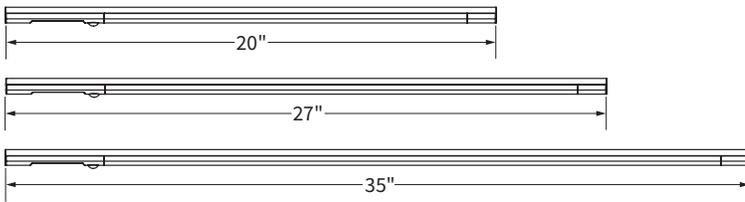


Child/Jumper units

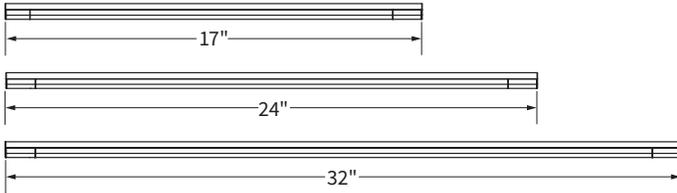

### Height & width



## Occupancy sensor range and field of view

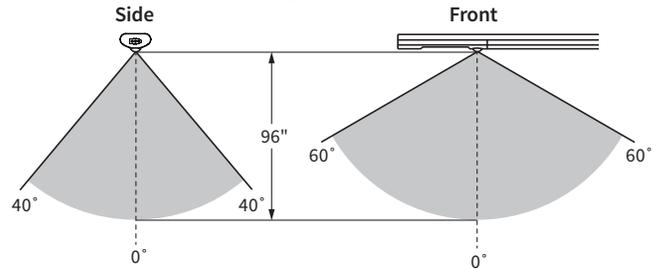

## Daisy chain configuration examples

Supports up to 80" of actual fixture length

35" Parent	27" Parent	20" Parent	32" Child/Jumper	24" Child/Jumper	17" Child/Jumper	Maximum fixtures per daisy chain
1			1			2
1				1	1	3
1					2	3
	1		1		1	3
	1			2		3
	1			1	1	3
	1				3	4
		1	1	1		3
		1		2		3
		1			3	4

# CIGLIO™ LED UNDER-CABINET LIGHT

## Specifications


### Ciglio, 20" Parent & 17" Child

Foot candle power (@ 18"):	<b>100 fc</b>
Light output (lumens):	<b>652 lm</b>
Power consumption (wattage):	<b>9.5 W</b>
Lumens per watt:	<b>68 lm/W</b>
Photometric performance:	<b>See chart</b>
Light color temperature (CCT):	<b>3500 K</b>
Color Rendering Index (CRI):	<b>83 CRI</b>
Fixture dimensions:	Parent - W: 20" x H: 0.625" x D: 1.25" Child - W: 17" x H: 0.625" x D: 1.25"*
Recommended installation:	<b>24" cabinets</b>

*Note: Child units do not contain user controls, all operations driven via parent touch control occupancy sensor.*

## Photometrics


Source at 18"

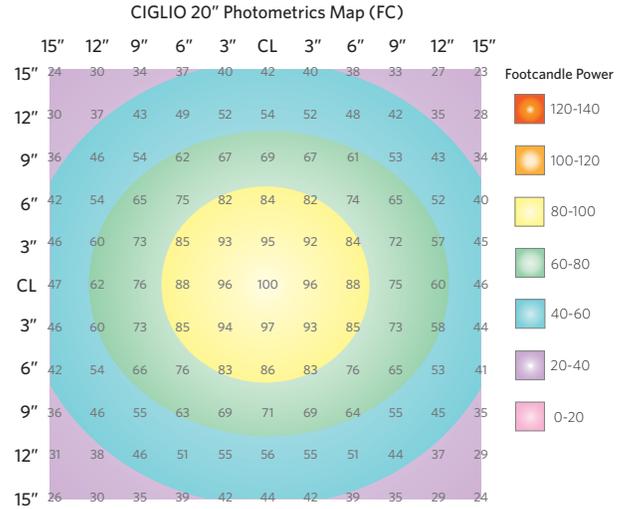

### Ciglio, 27" Parent & 24" Child

Foot candle power (@ 18"):	<b>132 fc</b>
Light output (lumens):	<b>1032 lm</b>
Power consumption (wattage):	<b>14 W</b>
Lumens per watt:	<b>73 lm/W</b>
Photometric performance:	<b>See chart</b>
Light color temperature (CCT):	<b>3500 K</b>
Color Rendering Index (CRI):	<b>83 CRI</b>
Fixture dimensions:	Parent: W: 27" x H: 0.625" x D: 1.25" Child: W: 24" x H: 0.625" x D: 1.25"*
Recommended installation:	<b>32" cabinets</b>


*Note: Child units do not contain user controls, all operations driven via parent touch control occupancy sensor.*

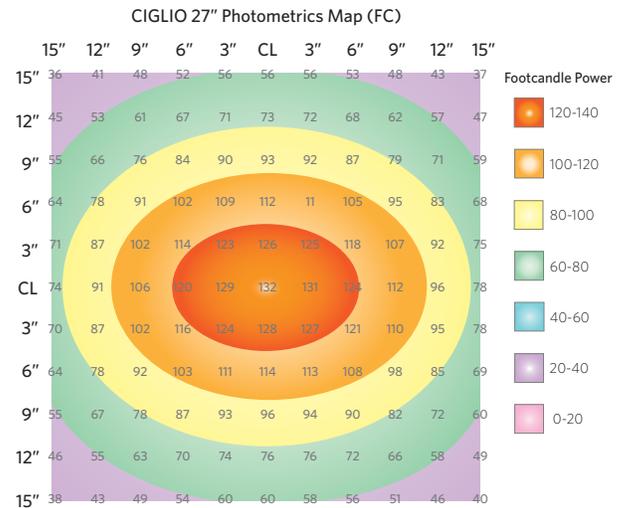

### Ciglio, 35" Parent & 32" Child

Foot candle power (@ 18"):	<b>136 fc</b>
Light output (lumens):	<b>1431 lm</b>
Power consumption (wattage):	<b>20.9 W</b>
Lumens per watt:	<b>68 lm/W</b>
Photometric performance:	<b>See chart</b>
Light color temperature (CCT):	<b>3500 K</b>
Color Rendering Index (CRI):	<b>86 CRI</b>
Fixture dimensions:	Parent: W: 35" x H: 0.625" x D: 1.25" Child: W: 32" x H: 0.625" x D: 1.25"
Recommended installation:	<b>48" cabinets</b>

*Note: Child units do not contain user controls, all operations driven via parent touch control occupancy sensor.*

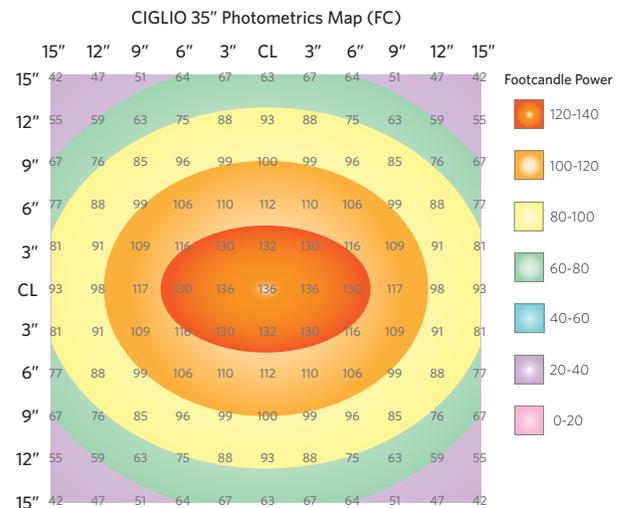

# CIGLIO™ LED UNDER-CABINET LIGHT

## PRODUCT COMPARISON: UNDER-CABINET TASK LIGHTING

	Ciglio			Verano			Dazz—SL			
										
FIXTURE/MODEL SIZE	20"	27"	35"	24"	36"	48"	24"	36"	48"	60"
LIST PRICE	\$355/\$395	\$475/\$515	\$585/\$625	\$250	\$350	\$450	\$110	\$114	\$125	\$144
LIGHT OUTPUT										
Foot Candle Power (@ 18")	100 fc	132 fc	136 fc	109 fc	148 fc	155 fc	per bulb	per bulb	per bulb	per bulb
Peak Lumen Output	652 lm	1032 lm	1431 lm	325 lm	513 lm	677 lm	~540 lm	~1256 lm	~1953 lm	~2697 lm
Color Temperature	3500 K	3500 K	3500 K	3300 K	3300 K	3300 K	4200 K	4100 K	4100 K	4100 K
CRI	83	83	86	97	97	97	85	85	85	85
Dimming	●	●	●							
ENERGY EFFICIENCY										
System Power Consumption	9.5 W	14 W	20.9 W	12.3 W	15.6 W	22.3 W	12 W	16.2 W	21 W	28 W
Lumens per Watt	68 lm/W	73 lm/W	68 lm/W	26 lm/W	32 lm/W	30 lm/W	45 lm/W	89 lm/W	93 lm/W	96 lm/W
PIR Occupancy Sensor	●	●	●							
L70 Estimated Life	90,000+ hr.	90,000+ hr.	90,000+ hr.	50,000+ hr.	50,000+ hr.	50,000+ hr.	50,000+ hr.	50,000+ hr.	50,000+ hr.	50,000+ hr.
DAISY CHAIN SYSTEM OPTIONS										
Max # of Same Size Fixtures in Daisy Chain	4	3	2	4	3	2	5	3	2	2
Jumper Cable Options	5	5	5	2	2	2	1	1	1	1
Supports Mixed Size Daisy Chain Configurations	●	●	●	●	●	●	●	●	●	●
FIXTURE HOUSING										
Control/ Switch Type	Touch strip	Touch strip	Touch strip	Push button	Push button	Push button	Rocker switch	Rocker switch	Rocker switch	Rocker switch
Number of LED's In Fixture	42	63	84	8	12	16				
Metal Installation Mounts	Magnetic	Magnetic	Magnetic	Magnetic	Magnetic	Magnetic	Slide bars	Slide bars	Slide bars	Slide bars
Wood Installation Mounts	Screw	Screw	Screw	Screw	Screw	Screw	Screw (not included)	Screw (not included)	Screw (not included)	Screw (not included)
Rotation Mount				●	●	●				
Recommended Cabinet Installation Size	24"	36"	48"	24"	36"	48"	24"	36"	48"	60"
Colors	Sterling Silver	Sterling Silver	Sterling Silver	Sterling Silver, Carbon Black	Sterling Silver, Carbon Black	Sterling Silver, Carbon Black	Black	Black	Black	Black
WARRANTY										
Fixture	5 years	5 years	5 years	5 years	5 years	5 years	5 years	5 years	5 years	5 years
Transformer or Ballast	1 year	1 year	1 year	1 year	1 year	1 year	1 year	1 year	1 year	1 year